



MiBoxer 24W RGB+CCT 24V LED Slimline Wall Washer Light



Features & Benefits:


- Discrete, lightweight & slimline design.
- The IP66 rating allows this unit to be useable outdoors
- Bright colour-changing RGB+CCT LEDs
- RF 2.4GHz connection
- >15m illumination distance
- Five Year Warranty
- · For use with 24V Drivers
- · Male Connector Cable Length: 560mm
- Female Connector Cable Length: 400mm
- Selection of RF & DMX Control options available



1.21KG appx

Product Code: Product Type: LED Slimline Wall Washer Guarantee Period: 5 Years Colour: RGB+CCT Colour Temperature: 2700K - 6500K Power: 24W Adjustable Angle: Input Voltage: Operating Protocol: RF 2.4GHz & DMX Beam Angle: 24° Working Temperature: -20~45°C CRI Rating: Light Efficiency: 70LM/W Luminous Flux: 1600LM	
Guarantee Period: 5 Years Colour: RGB+CCT Colour Temperature: 2700K - 6500K Power: 24W Adjustable Angle: 180° Input Voltage: 24V DC Operating Protocol: RF 2.4GHz & DMX Beam Angle: 24° Working Temperature: -20~45°C CRI Rating: >80 Light Efficiency: 70LM/W	
Colour: RGB+CCT Colour Temperature: 2700K - 6500K Power: 24W Adjustable Angle: 180° Input Voltage: 24V DC Operating Protocol: RF 2.4GHz & DMX Beam Angle: 24° Working Temperature: -20~45°C CRI Rating: >80 Light Efficiency: 70LM/W	
Colour Temperature: 2700K - 6500K Power: 24W Adjustable Angle: 180° Input Voltage: 24V DC Operating Protocol: RF 2.4GHz & DMX Beam Angle: 24° Working Temperature: -20~45°C CRI Rating: >80 Light Efficiency: 70LM/W	
Power: 24W Adjustable Angle: 180° Input Voltage: 24V DC Operating Protocol: RF 2.4GHz & DMX Beam Angle: 24° Working Temperature: -20~45°C CRI Rating: >80 Light Efficiency: 70LM/W	
Adjustable Angle: 180° Input Voltage: 24V DC Operating Protocol: RF 2.4GHz & DMX Beam Angle: 24° Working Temperature: -20~45°C CRI Rating: >80 Light Efficiency: 70LM/W	
Input Voltage: 24V DC Operating Protocol: RF 2.4GHz & DMX Beam Angle: 24° Working Temperature: -20~45°C CRI Rating: >80 Light Efficiency: 70LM/W	
Operating Protocol: RF 2.4GHz & DMX Beam Angle: 24° Working Temperature: -20~45°C CRI Rating: >80 Light Efficiency: 70LM/W	
Beam Angle: 24° Working Temperature: -20~45°C CRI Rating: >80 Light Efficiency: 70LM/W	
Working Temperature: -20~45°C CRI Rating: >80 Light Efficiency: 70LM/W	
CRI Rating: >80 Light Efficiency: 70LM/W	
Light Efficiency: 70LM/W	
Luminous Flux: 1600LM	
Illumination Distance: >15m	
IP Rating: IP66	
Average LED lifetime: 50,000 Hours	
Unit Size: 993 x 35 x 69 (mm)	
Size (Excluding Adjustable Brackets): 993 x 35 x 27 (mm)	
Dimmable: Yes	
Control Distance: 30m	

Dimensions (Unit: mm)

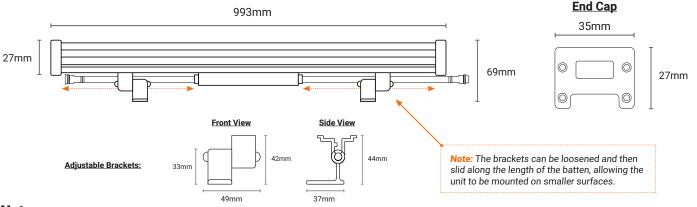

Notes:

- The adjustable LED Batten brackets can be tilted 180° forward & backwards
- This batten does not require a separate RF Receiver. Only a suitable 24V Driver is required
- There are Male & Female 'plug & play' style connection wires on either end of the batten
- · 1m Starter Cables & T Connection Cables for this batten are available online www.ledtechnologies.co.uk
- Starter Cable Product Code: AMGP12FN2B / 'T' Connection Cable Product Code: AMGP12DT2B




Telephone: 01260 540014





MiBoxer 24W RGB+CCT 24V LED Slimline Wall Washer Light

RL524 Connection Diagram

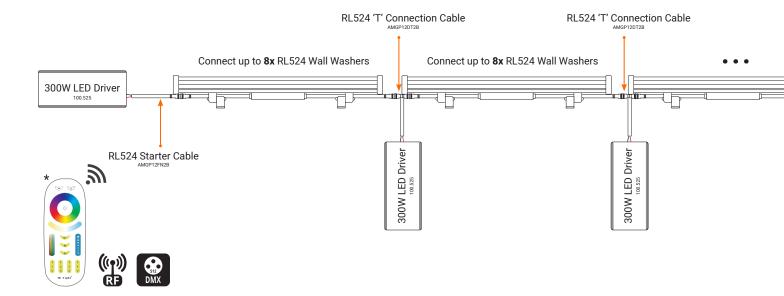

Notes:

- Using our 300W LED Driver (100.525) you can connect up to 8x RL524 Wall Washers in a single chain
- The RL524 Starter Cable (AMGP12FN2B) is required to power the the first 8x RL524 Wall Washers
- 'T' Connection Cables (AMGP12DT2B) can be used to extend the chain by a further 8x Wall Washers when connected to another 300W LED Driver. This process can be repeated to extend the chain of wall washers even further.
- *Various controls are available including Wireless DMX & RF options, contact us for more information



Telephone: 01260 540014